



INTEK STEAMER

ELECTRIC MODEL XS

The Intek XS connectionless countertop steamer unit has a pan capacity of 6 pans (2.5" deep 12" x 20") or 4 pans (4" deep 12" x 20"). Unit must be capable of producing steam at 212°F with no water or drain connection required. Unit is to have inverted convection fan technology and includes a 1 year parts and labor warranty. NSF listed as both steamer and holding cabinet. UL listed.

AVAILABLE MODELS:

- XS-208-8-1 (208V, 8kW, 1-Phase)
- XS-208-8-3 (208V, 8kW, 3-Phase)
- XS-208-12-3 (208V, 12kW, 3-Phase)
- XS-208-14-3 (208V, 14kW, 3-Phase)
- XS-240-8-1 (240V, 8kW, 1-Phase)
- XS-240-8-3 (240V, 8kW, 3-Phase)
- XS-240-12-3 (240V, 12kW, 3-Phase)
- XS-240-14-3 (240V, 14kW, 3-Phase)
- XS-480-12-3 (480V, 12kW, 3-Phase)

STANDARD FEATURES:

- Produces steam at 212°F with no water or drain connection
- Inverted flow forced convection technology
- Magnetic door switch turns off convection fan when door is open
- 60 minute electro-mechanical timer, 2 position ON/OFF selector switch, indicator lights for COOK, STANDBY, HEAT and LOW WATER
- Low water warning system with automatic shutdown control

CONSTRUCTION:

- 14 gauge reinforced stainless steel cavity
- Two panel door with rugged 14 gauge stainless steel outer door
- Heavy refrigeration style door handle with magnetic latch
- Stainless steel wire racks positioned to support 1", 2.5", 4", or 6" deep pans
- Front mounted water reservoir manual drain line

OPERATION:

- Inverted flow convection fan in cooking chamber
- NSF approved holding cabinet
- Open door while cooking
- Heating element external to compartment and not exposed to water
- 3 gallon capacity water reservoir

ORIGIN OF MANUFACTURE:

Designed and manufactured in the United States.

PROJECT NAME:

LOCATION:

ITEM NO:

QTY:

MODEL NO:

AIA NO:


SIS NO:

6 pan capacity stainless steel pressureless, connectionless steamer. Tabletop, self-contained, electric heated. (Model XS shown)



OPTIONS/ACCESSORIES:



- Stand w/Bullet Feet for Single or Double Stack
- Casters for Stand
- Flanged Feet for Stand
- Door Hinged Left
- Correction Package
- Trivet

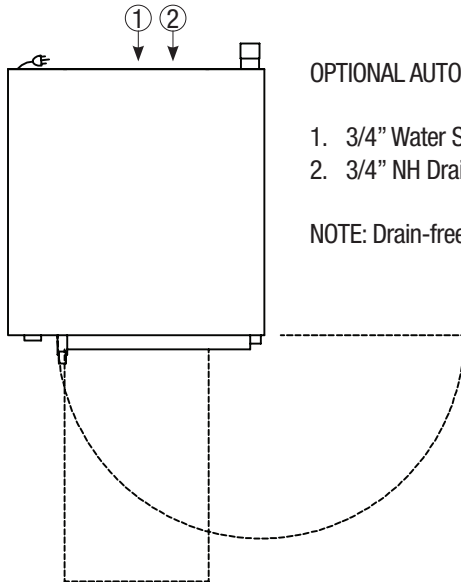

OPTIONAL AUTO WATER FILL CONNECTIONS:

1. 3/4" Water Supply Hose Connection
2. 3/4" NH Drain Connection

NOTE: Drain-free venting, do not connect directly to drain. Allow 2" air gap.

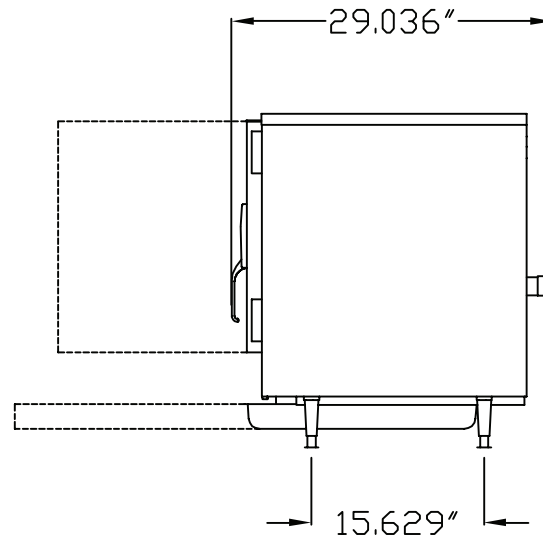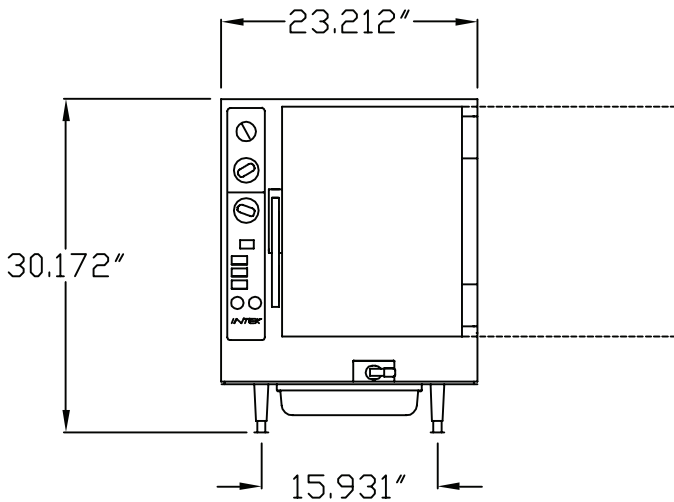







Model	No. of Pans	Voltage	KW/hr	NEMA	Width IN	Depth IN	Height* IN	Weight LBS
XS-208-6-1	6	208/60/1	6	6-50P	23-1/4"	29"	30-1/4"	270
XS-208-8-1	6	208/60/1	8	6-50P	23-1/4"	29"	30-1/4"	270
XS-208-8-3	6	208/60/3	8	L15-30P	23-1/4"	29"	30-1/4"	270
XS-208-12-3	6	208/60/3	12	15-50P	23-1/4"	29"	30-1/4"	270
XS-208-14-3	6	208/60/3	14	15-50P	23-1/4"	29"	30-1/4"	270
XS-240-6-1	6	240/60/1	6	6-50P	23-1/4"	29"	30-1/4"	270
XS-240-8-1	6	240/60/1	8	6-50P	23-1/4"	29"	30-1/4"	270
XS-240-8-3	6	240/60/3	8	L15-30P	23-1/4"	29"	30-1/4"	270
XS-240-12-3	6	240/60/3	12	15-50P	23-1/4"	29"	30-1/4"	270
XS-240-14-3	6	240/60/3	14	15-50P	23-1/4"	29"	30-1/4"	270
XS-480-12-3	6	480/60/3	12	L16-20	23-1/4"	29"	30-1/4"	270
170944	STAND W/BULLET FEET, FOR SINGLE OR DOUBLE STACKED				27"	32.5"	47"	62

*Optional stands are 27" w x 32.5" d x 47" h, 62 lbs. Overall height of unit installed on a single stand is 60.25". Overall height of units installed on a double stand is 71.5".







XS SINGLE AND
DOUBLE STACKED
UNITS

Stands shown with optional casters. Stands standard with bullet feet.



XS ON 10CA

XS ON 10NC

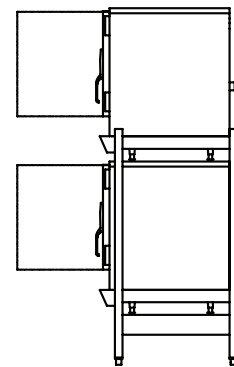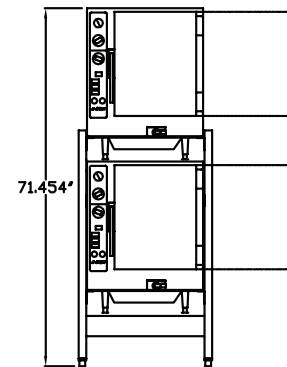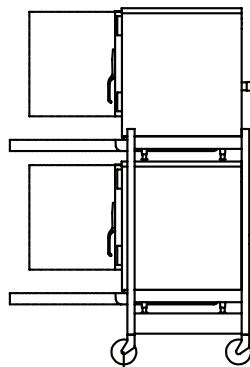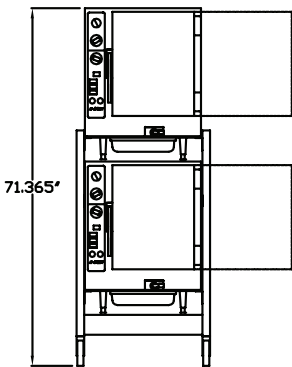

XS ON 20CA

XS ON 20NC