



Value • Performance • Quality

48" T-SERIES RESTAURANT RANGE

Restaurant Range Series provides as standard many of the optional upgrades normally offered at a premium on other Range lines. The standard include a stainless steel front, ledge, backguard and shelf; aluminized sides. The stainless steel seams and edges are welded so the Range looks as good as it performs.

Standard features include:

- 48" Range includes two 20" oven with 8 open burners
- Stainless steel front oven doors, landing ledge and backguard with shelf, control panel and kick plate.
- Welded and finished stainless steel seams.
- Porcelainized oven interior includes: sides, rear, deck and door linings.
- Oven burner provides 30,000 BTU/hr. Equipped with one heavy-duty locking chrome plated rack



TSR-G12-6

Design Features:

- 12" x 12" heavy duty cast iron section grates remove easily and safely. Cast-in bowl directs heat to the cooking surface.
- Highly polished $\frac{3}{4}$ " plate with 3" wide grease trough.
- 20,000 BTU/hr burner for every 12" of griddle surface. Located on the left side of range top.
- Manual controls are standard, thermostatic controls optional.

Options & Accessories

- Additional Racks
- Reinforcement channels for mounting cheese melter/salamander
- Stainless steel stub backs
- Thermostatic controls for griddles
- Casters – Set of 4
- Quick Disconnect and Flexible Gas Hose

Certifications



Tri-Star Manufacturing • 1307 N Watters Rd. Suite 180, Allen, TX 75013 • (800) 431.2745 • (972) 908-6100

www.tri-starmfg.com • customercare@standexcsg.com


Revised 033016cp



Value • Performance • Quality

48" T-SERIES RESTAURANT RANGE

PRODUCT SPECIFICATIONS

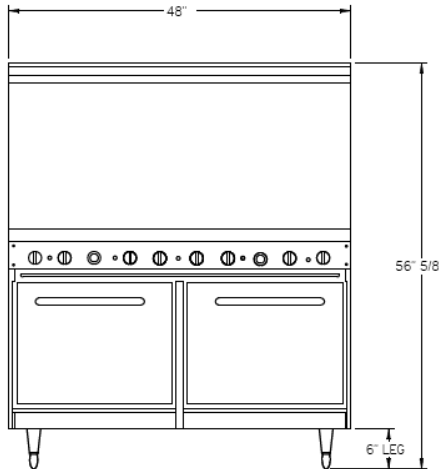

Construction:

16 gauge construction with welded front frame. Fully insulated with non-sag fiberglass. Porcelainized oven interior includes; deck and door linings.

Clearance: Legs or casters are required. or 2" over-hang is required when curb mounted. Provide 0" clearance from non-combustible surfaces and 4" from back, 10" from sides from combustible surfaces.

Gas Information:

Manifold pressure is 5.0"W.C. for natural gas or 10.0" W.C. for propane gas. Manifold size is 3/4" NPT. 3/4" pressure regulator supplied with equipment to be installed at time of connection.

Must specify type of gas and elevation if over 2000 ft. when ordering.

TSR-8

8 burner, two 20" Standard Ovens, 380,000 BTU

TSR-G12-6

6 burner, 12" Griddle, two 20" Standard Ovens, 320,000 BTU

TSR-G24-4


4 burner, 24" Griddle, two 20" Standard Ovens, 260,000 BTU

TSR-G36-2

2 burner, 36" Griddle, two 20" Standard Ovens, 200,000 BTU

TSR-G-48

0 burner, 48" Griddle, two 20" Standard Ovens, 140,000 BTU

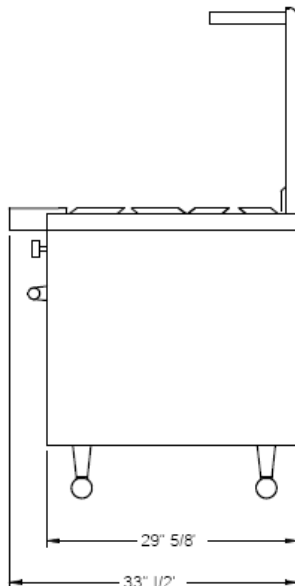

Overall Dimensions:

TSR-8: 33 1/2"D x 56 5/8"H x 48"W

TSR-G12-6: 33 1/2"D x 56 5/8"H x 48"W

TSR-G24-4: 33 1/2"D x 56 5/8"H x 48"W

TSR-G36-2: 33 1/2"D x 56 5/8"H x 48"W

TSR-G-48: 33 1/2"D x 56 5/8"H x 48"W

Shipping Weight:

TSR-8: 740 lbs.

TSR-G12-6: 775 lbs.

TSR-G24-4: 825 lbs.

TSR-G36-2: 865 lbs.

TSR-G-48: 885 lbs.

Freight Class: 85